


GFS 滾輪送料機系列

GFS ROLL FEEDER

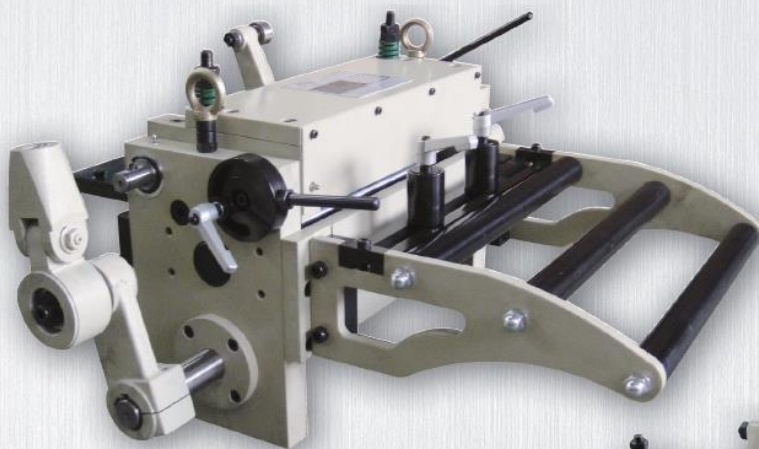

特性 FEATURES

- ❑ 傳動之拉桿為伸縮可調式，避免太長太短拉桿極易扯斷造成機台損壞及工安事件。
Adjustable driving shaft designed is to prevent the impact damaged from press while the stamping job is running.
- ❑ 採用精密度高、穩定性佳之零件組立，可提升客戶的產能及機台壽命。
The feeder is adopting the high precision finishing parts to offer the longest life term for ensuring the stable productivity performance.
- ❑ 可多工程連續沖壓，每分鐘可達600次。
The feeder is capable for 600 S.P.M. under the progressive tooling stamping job.
- ❑ 泛用性佳，無論材料之寬度與厚度，只需調整送料機去配合模具即可簡單使用。
Easy adjustment allows working with wide range of material thickness.
- ❑ 沖床直接傳動，不耗電、氣能源，節能減碳效果佳。
The feeder is driven by press directly, saving the energy and cost for sure.

標準附件 Standard accessories


- ❑ 偏心盤(含心軸.固定座)
Eccentric wheel unit. (Including Main driving shaft, Fixing bracket).
- ❑ 可調式拉桿
Adjustable driving shaft.
- ❑ 單向裝置
One way running device.

特殊附件 Optional accessories

- ❑ 微調裝置
Micro tuning adjuster.
- ❑ PU上輪
PU roller (Top roller)
- ❑ 雙面給油器
Material two-face sided lubricator.
- ❑ 雙邊送料裝置
Dual feeders' synchronism device. (For Push-Pull feeding requirement, it is required for a second feeder to be worked with)

規格 Specification

型式 Model	材料寬度 Material width (mm)	送料長度 Feed length (mm)	材料厚度 Material thickness (mm)	送料線高度 Pass line height (mm)	沖床噸數 Capacity of press (ton)
GFS-065NS	60	50	0-1.6	55-100	5-20
GFS-105NS	100	50	0-1.6	55-100	5-20
GFS-205NS	200	50	0-1.6	55-100	20
GFS-138NS	130	80	0-1.6	60-120	10-60
GFS-208NS	200	80	0-1.6	60-120	20-60
GFS-1310NS	130	100	0-3.5	70-140	40-60
GFS-2010NS	200	100	0-3.5	70-140	40-80
GFS-3010NS	300	100	0-3.5	70-140	60-160
GFS-4010NS	400	100	0-3.5	70-140	80-260
GFS-5010NS	500	100	0-3.5	70-140	110-260
GFS-6010NS	600	100	0-3.5	70-140	160-260
GFS-7010NS	700	100	0-3.5	70-140	160-260
GFS-1315NS	130	150	0-3.5	70-140	40-60
GFS-2015NS	200	150	0-3.5	70-140	40-80
GFS-3015NS	300	150	0-3.5	70-140	60-160
GFS-4015NS	400	150	0-3.5	70-140	80-260
GFS-5015NS	500	150	0-3.5	70-140	110-260
GFS-6015NS	600	150	0-3.5	70-140	160-260
GFS-7015NS	700	150	0-3.5	70-140	160-260
GFS-1320NS	130	200	0-3.5	70-140	40-60
GFS-2020NS	200	200	0-3.5	70-140	40-80
GFS-3020NS	300	200	0-3.5	70-140	60-160
GFS-4020NS	400	200	0-3.5	70-140	80-260
GFS-5020NS	500	200	0-3.5	70-140	110-260
GFS-6020NS	600	200	0-3.5	70-140	160-260
GFS-7020NS	700	200	0-3.5	70-140	160-260

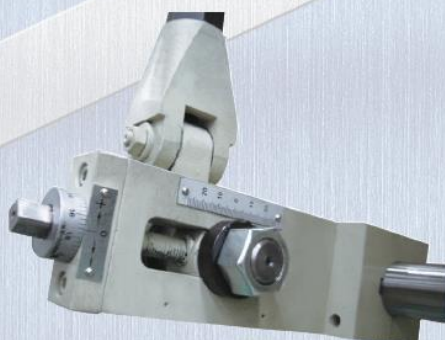

Micro Adjustment
微調裝置

